


## CuddleCot 230V Technical Features



### System Components

- 1 x sturdy plastic storage/carry case with metal closures
- 1 x Shnuggle™ plastic bassinet with mattress, dressing & stand
- 1 x mains powered cooling unit
- 1 x large flexible plastic cooling pad (reusable)
- 1 x small flexible plastic cooling pad (reusable)
- 1 x flexible insulated connection hose
- 2 x sheets foil backed insulation (1 small, 1 large)
- 1 x 100ml biocide additive liquid
- 1 x drain key
- 1 x user guide

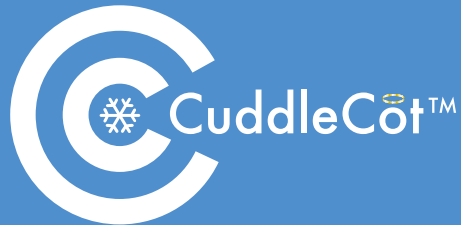

## Technical Specification Summary

**Power requirement:** Mains 230V/50Hz

**Mains cable length:** 2.1 metres with bonded plug

**Internal fuse rating:** : 4A/250V quick blow

**Cooling method:** : Thermoelectric (Peltier). Non refrigerant. Max. 180W

**Cooling medium:** : Purified water e.g. distilled/de ionised/sterilised. (Not supplied). Self-contained. 450ml operating capacity

**Operating temperature range:** : 8 1313°C depending on ambient temperature

**Total system dimensions as packed:** 489mm x 324mm x 216mm, weight 8.9kg


**Cooling unit dimensions:** 27cm x 23cm x 13cm, weight 3.8kg

**Cooling pad dimensions (unfilled):** Large (full term) 550mm x 400mm, Small (premature) 290mm x 154mm

**Cooling hose length:** 900mm

**Fluid hose connections type:** Quick connect/release throughout

*NOTE: All measurements are approximate*

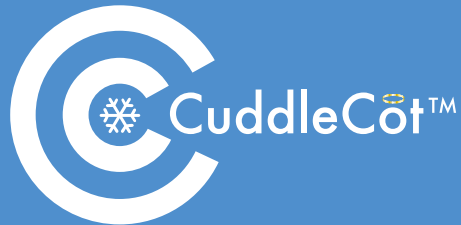

## General Features

- Low fluid alarm – visual and audible alerts
- Variable temperature control
- Display shows current temperature and set temperature (switchable between Celsius and Fahrenheit)
- Whisper quiet operation; only two moving parts
- Few moving parts therefore minimal user maintenance required
- Non-slip rubber feet
- All component surfaces can be wiped with any plastic safe sanitiser
- Conformities:  
UL 61010-1:2012. CAN/CSA-C22.2 No. 61010-1-12  
IEC 61010-1:2010 (IECEE CB Scheme). CE compliant
- NOT A MEDICAL DEVICE
- All spares available from UK stock –  
Contact us at [www.cuddlecot.com](http://www.cuddlecot.com)

