


CuddleCot 230V Technical Features



System Components

- 1 x sturdy plastic storage/carry case with metal closures
- 1 x Shnuggle™ plastic bassinet with mattress, dressing & stand
- 1 x mains powered cooling unit
- 1 x large flexible plastic cooling pad (reusable)
- 1 x small flexible plastic cooling pad (reusable)
- 1 x flexible insulated connection hose
- 2 x sheets foil backed insulation (1 small, 1 large)
- 1 x 100ml biocide additive liquid
- 1 x drain key
- 1 x user guide

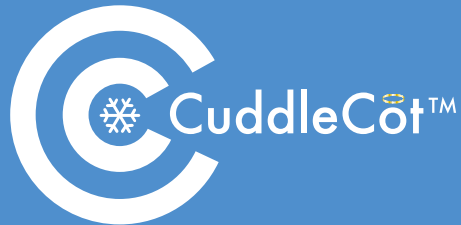

Technical Specification Summary

Power requirement: Mains 230V/50Hz

Mains cable length: 2.1 metres with bonded plug

Internal fuse rating: : 4A/250V quick blow

Cooling method: : Thermoelectric (Peltier). Non refrigerant. Max. 180W

Cooling medium: : Purified water e.g. distilled/de ionised/sterilised. (Not supplied). Self-contained. 450ml operating capacity

Operating temperature range: 8 – 13°C depending on ambient temperature

Total system dimensions as packed: 489mm x 324mm x 216mm, weight 8.9kg


Cooling unit dimensions: 27cm x 23cm x 13cm, weight 3.8kg

Cooling pad dimensions (unfilled): Large (full term) 550mm x 400mm, Small (premature) 290mm x 154mm

Cooling hose length: 900mm

Fluid hose connections type: Quick connect/release throughout

NOTE: All measurements are approximate

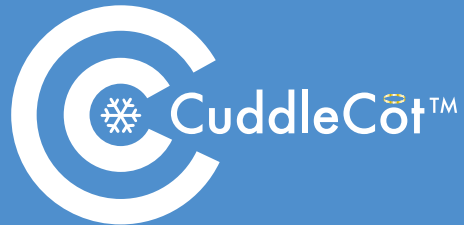

General Features

- Low fluid alarm – visual and audible alerts
- Variable temperature control
- Display shows current temperature and set temperature (switchable between Celsius and Fahrenheit)
- Whisper quiet operation; only two moving parts
- Few moving parts therefore minimal user maintenance required
- Non-slip rubber feet
- All component surfaces can be wiped with any plastic safe sanitiser
- Conformities:
UL 61010-1:2012. CAN/CSA-C22.2 No. 61010-1-12
IEC 61010-1:2010 (IECEE CB Scheme). CE compliant
- NOT A MEDICAL DEVICE
- All spares available from UK stock –
Contact us at www.cuddlecot.com

